

1 ALPHA2 32-80 180



- AUTOADAPT

3/

(EEI) -

(N)

Energieeinsparverordnung - EnEV § 14 (3).

- ALPHA2

ALPHA.

<0,8

: 2.. 110 °C

60 °C

983.2 / 3

TF

110

: VDE,GS,CE



EN-GJL-150

ASTM A48-150B





PES 30%GF

: : 0 .. 40 °C
: : 10.2
: : G 2
: : PN 10
: : 180
-P1: - : 3 .. 50
: : 50 Hz
: : 1 x 230 V
: : 0.04 .. 0.44 A
(IEC 34-5): X4D
(IEC 85): F
: (EEI): 0.18
: 2.18
: 2.3

ALPHA2 32-80 180 50

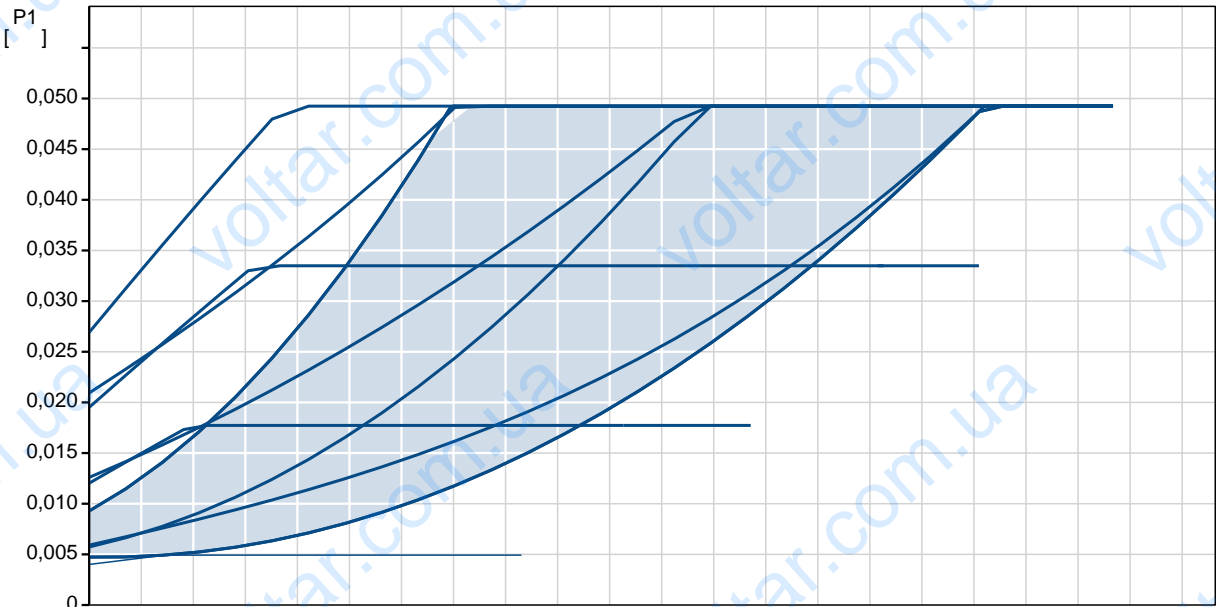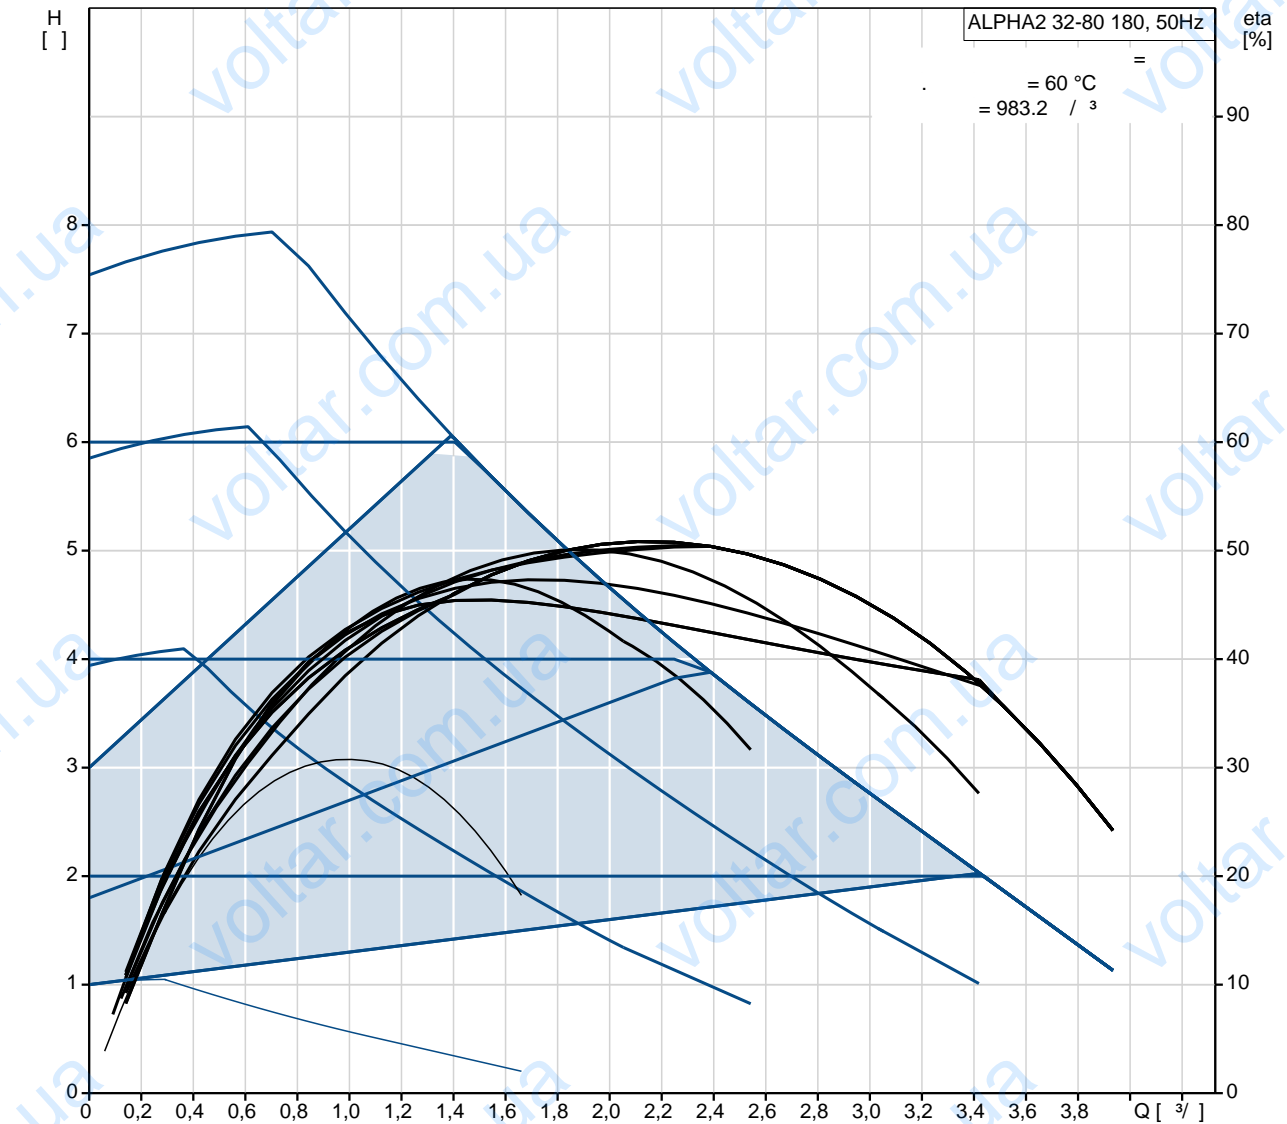

| | |
|------------------|---|
| ALPHA2 32-80 180 | |
| EAN | |
| TF | 80 110 VDE,GS,CE D |
| | EN-GJL-150 ASTM A48-150B PES 30%GF |
| | 0 .. 40 °C |
| | 10.2 G 2 PN 10 180 |
| | 2 .. 110 °C 60 °C 983.2 / 3 |
| ..P1: | 3 .. 50 50 Hz 1 x 230 V 0.04 .. 0.44 A |
| (IEC 34-5): | X4D |
| (IEC 85): | F |
| | ELEC |
| | 6H |
| (EEI): | 0.18 2.18 2.3 |

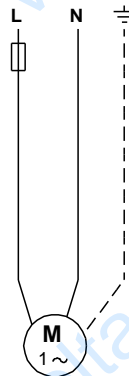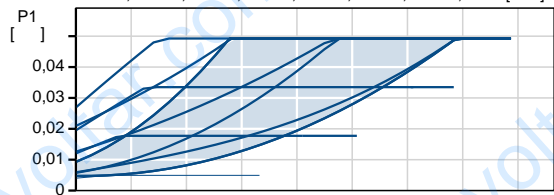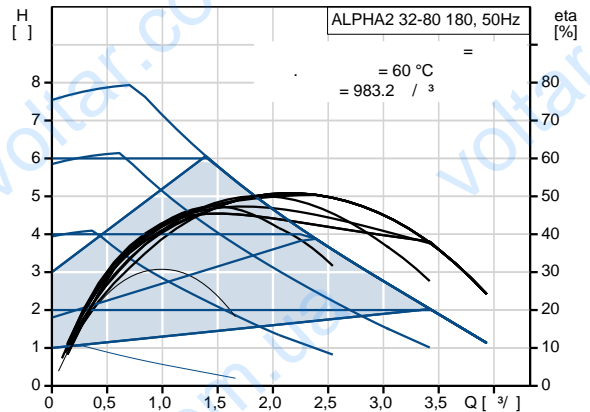

ALPHA2 32-80 180 50

